

CASCADE

PREMIUM 3-SIDED EXTRA DEEP ELECTRIC FIREPLACE

Dynamic Flame Depth. Panoramic Views.

The Cascade combines an extra-deep firebox, panoramic three-sided glass and multi-layer LED lighting to create exceptional visual depth. Dynamic flame, ember and downlighting effects recreate the natural flicker and glow of a real fire in a refined built-in design.



DYNAMIC LAYERED FLAMES

Multi-layer LED lighting creates natural flicker, changing firelight and exceptional visual depth.



REALISTIC FIRE DETAIL

Translucent logs, ember lighting and crackling sound create a rich fireplace experience.




CUSTOM FLAME SETTINGS

Choose from 3 flame styles, adjustable speeds and personalised colour settings.



EXTRA DEEP FIREBOX

An extra deep design enhances visual depth for a more immersive presentation.



3-SIDED DESIGN

Enjoy panoramic flame views from the front, left and right sides.



CUSTOMISABLE FIREBED

Style the look with driftwood logs, smoky crystals and vermiculite ashes.



SMART APP & ALEXA

Control the fireplace with remote, touch panel, smartphone app and Alexa on/off.

4 INSTALLATION OPTIONS



FRONT ONLY



LEFT CORNER



RIGHT CORNER



3-SIDED PANORAMIC

MODA
L I V I N G
modaliving.com.au


CASCADE

PREMIUM 3-SIDED ELECTRIC FIREPLACE

TECHNICAL INFORMATION


MODEL	40 / 50 / 60 / 72 / 78 / 100 / 118 inch
INSTALLATION OPTIONS	Front Only, Left Corner, Right Corner, 3-Sided Panoramic
FLAME DISPLAY	Dynamic Layered LED Flame Display
FLAME COLOURS	3
FLAME SPEEDS	3
FUEL BED COLOURS	3
DOWNLIGHT COLOURS	3
EMBER BED BRIGHTNESS	5 Levels
HEAT SETTINGS	Fan Only, Low 800W, High 1600W
MAX HEATING POWER	1600W
VOLTAGE	220-240V, 50Hz
TIMER	30 Minutes – 8 Hours
CONTROLS	Touch Panel, Remote Control, Smartphone App, Alexa
SAFETY FEATURES	Overheat Protection
WARRANTY	12 Months

OVERALL DIMENSIONS

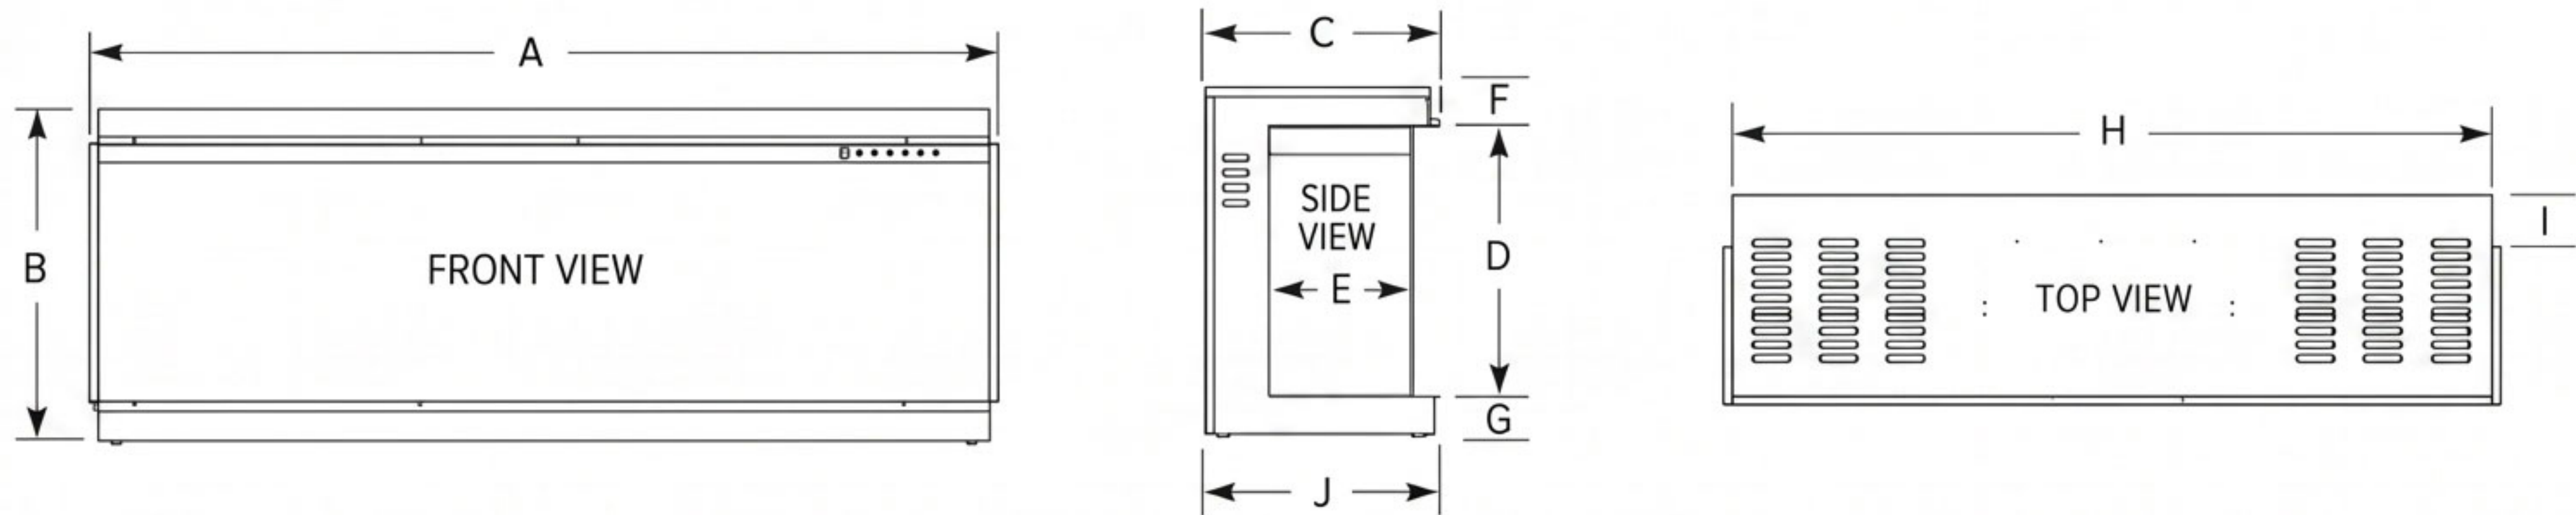

<i>all dimension in mm</i>	A	B	C	D	E	F	G	H	I	J
EF-CASC40	1035	567	317	445	180	60	60	1005	90	302
EF-CASC50	1270	540	332	416	195	60	60	1240	90	317
EF-CASC60	1524	540	332	416	195	60	60	1494	90	317
EF-CASC72	1830	540	332	416	195	60	60	1800	90	317
EF-CASC78	2000	540	332	416	195	60	60	1970	90	317
EF-CASC100	2540	540	332	416	195	60	60	2510	90	317
EF-CASC118	3000	540	332	416	195	60	60	2970	90	317

REQUIRED CAVITY DIMENSIONS

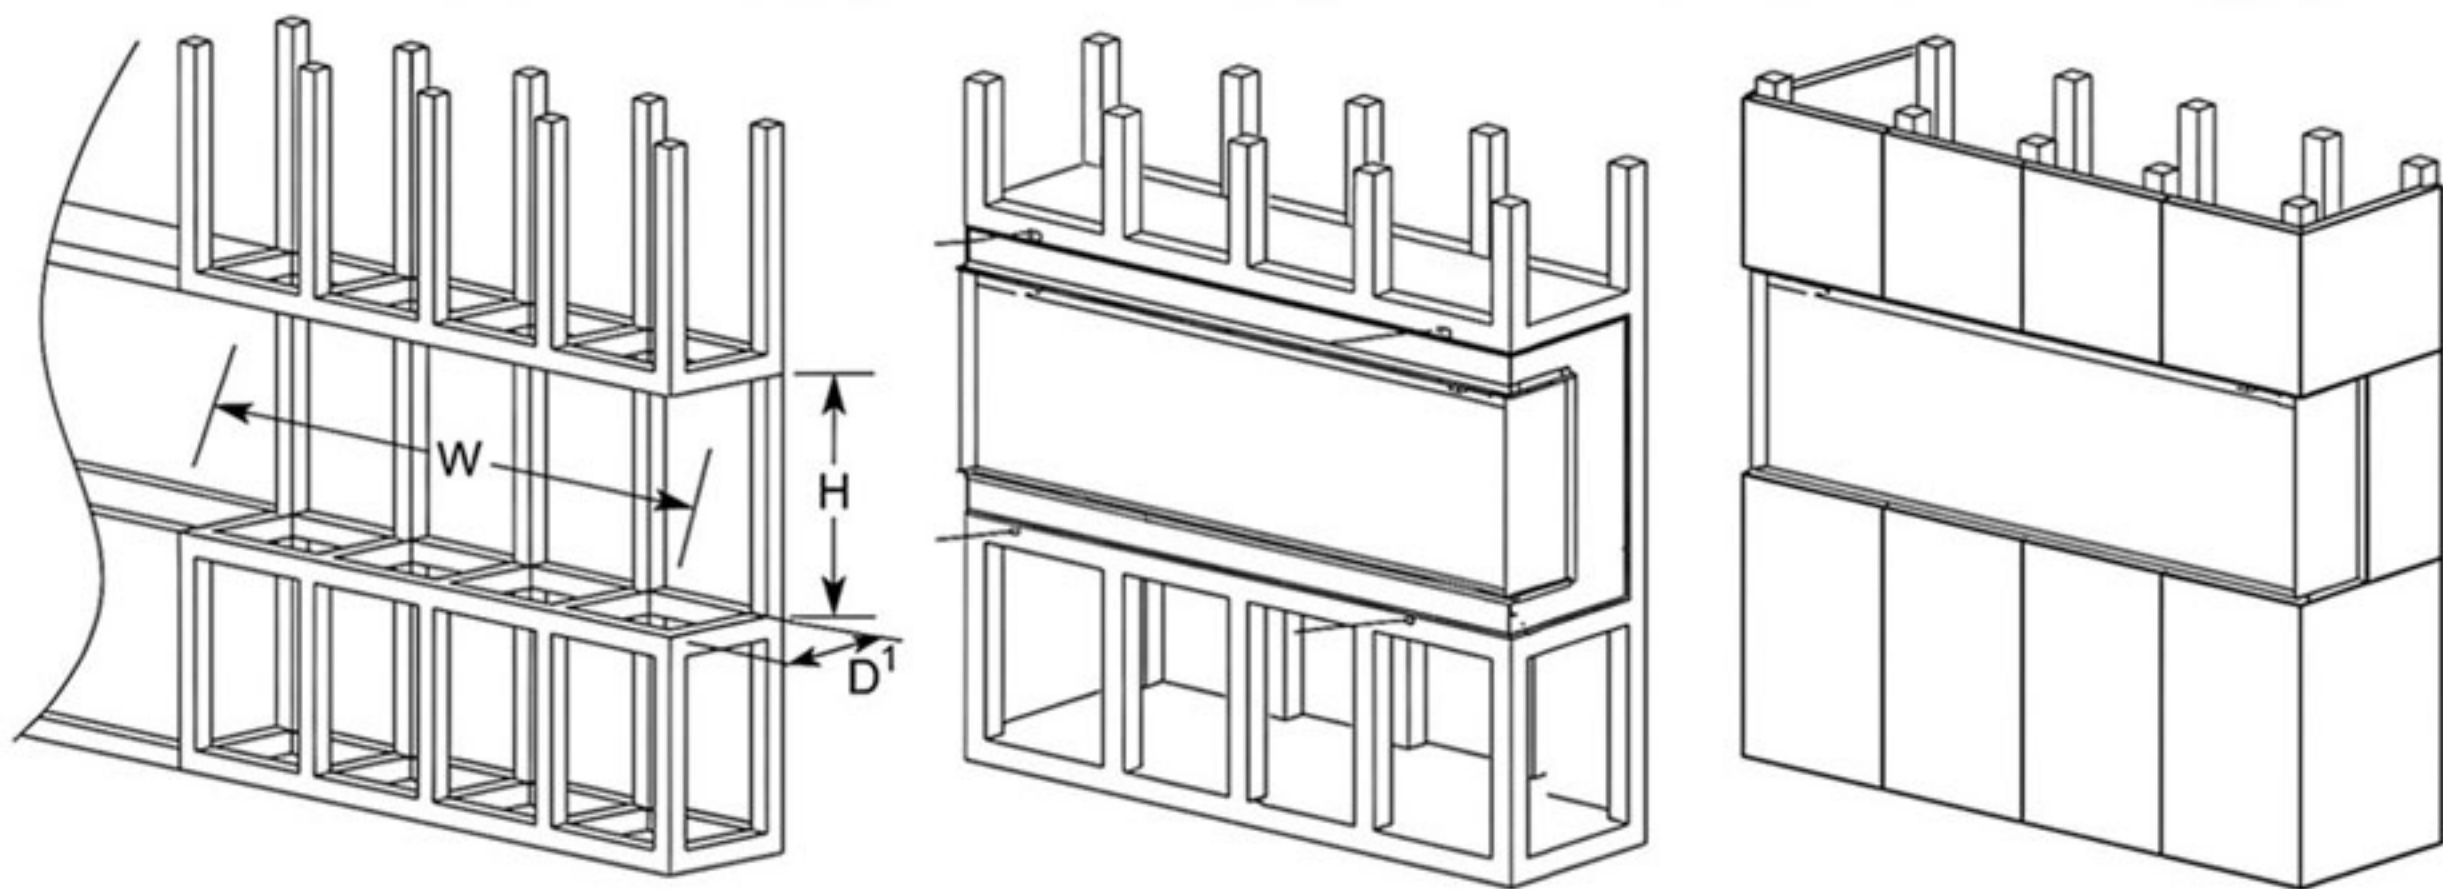

<i>all dimensions in mm</i>	W	D ¹	H
EF-CASC40 (40 inch)	1010	330	572
EF-CASC50 (50 inch)	1245	345	545
EF-CASC60 (60 inch)	1499	345	545
EF-CASC72 (72 inch)	1805	345	545
EF-CASC78 (78 inch)	1975	345	545
EF-CASC100 (100 inch)	2515	345	545
EF-CASC118 (118 inch)	2975	345	545

*1 - Cutout depth shown is the minimum required for the fireplace body only, if the power outlet is located directly behind the fireplace, allow an additional 70 mm clearance for the plug.

INCLUDED DECORATIVE MEDIA



DRIFTWOOD LOG SET



SMOKY CRYSTALS



CHARRED WOOD CHIPS



VERMICULITE

CONTACT US

- Unit 8/17 Stanton Road
Seven Hills, NSW 2147
- 1300 040 677
- 0482 087 109 (Call or SMS)
- info@modaliving.com.au
- modaliving.com.au
- Mon – Fri 9am – 5pm



PRODUCT DETAILS
& INSTALLATION VIDEO

MODA
L I V I N G